

Titus
Tekform




Sliding Door System

Set 200


Tekform Titus

Sliding Door Solutions with Titusoft SD100s




Simple and intuitive mounting

- No pre-drilling required
- Non-handed
- Integrated soft close activator for less assembly operations



Full door opening


- Unobstructed access into the cabinet interior
- Slim Titusoft SD100s design for concealed application
- Fits U and double U shaped profiles



Smooth and Reliable Soft Close

- Titus damper inside
- Effortless opening with low pull-out force
- Efficient damping on various door sizes and weights

Door adjustment


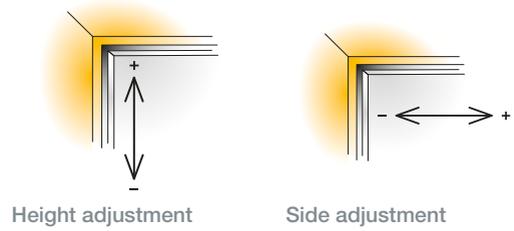


Adjustment

Height adjustment

Height adjustment is done through the adjustment screw on the bottom carriage.



Adjustment range depends on the preset position. Carriage is factory preset to the lowest value.

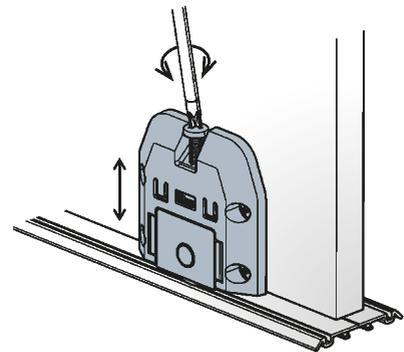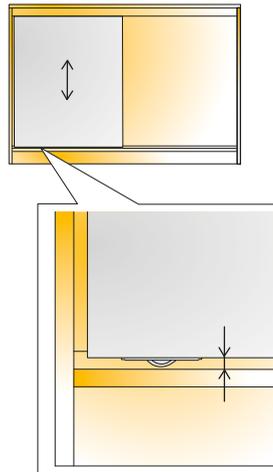

Side adjustment

Side adjustment is done through the stopper position.



The adjustment defines the gap between doors and cabinet side/wall.

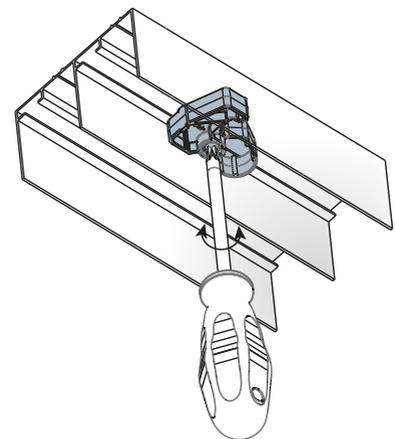

Stopper limits and stops the motion of the cabinet door.

Set 200 Sliding Door System

For bottom running sliding door systems

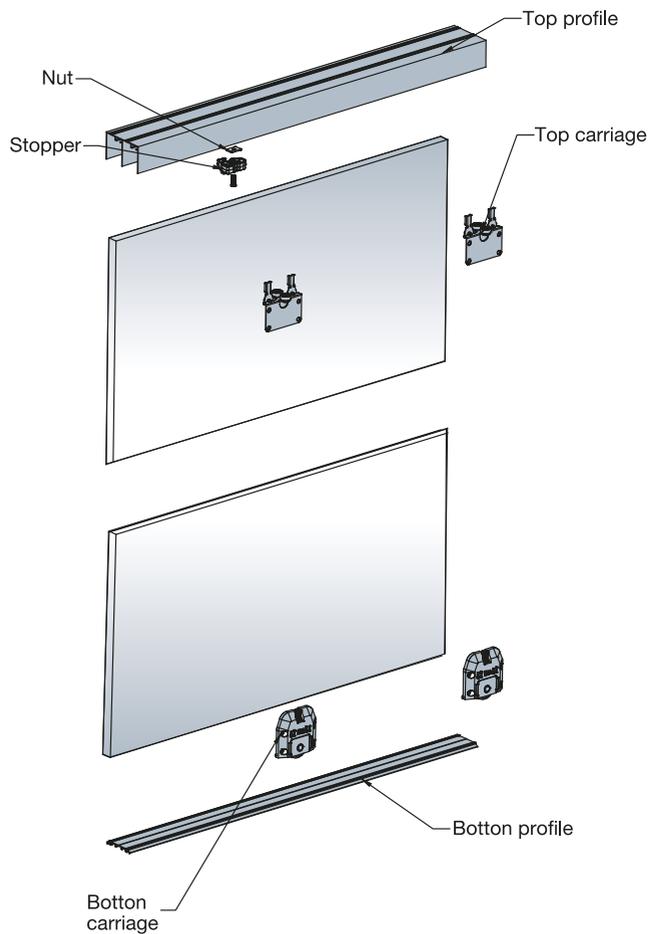

Item number for a set	Set for 2 doors	Set for 3 doors
610.9691.380 →	K1	K2
Set consists of the following:		
Bottom carriages 	4 pcs	6 pcs
Top carriages 	4 pcs	6 pcs
Pan head screws 	32 pcs	48 pcs
Stopper 	4 pcs	6 pcs
Nut for stopper 	4 pcs	6 pcs
Screw M4 x 16 for stopper 	4 pcs	6 pcs
Self-adhesive tape	5 pcs	5 pcs
Mounting instructions 	1 pce	1 pce




Rail accessories are not included and can be ordered separately.




- Door weight
- Door thickness
- Door material

Max. 50kg
 18-22mm
 Wood (chipboard, MDF, solid wood)

Mounting details

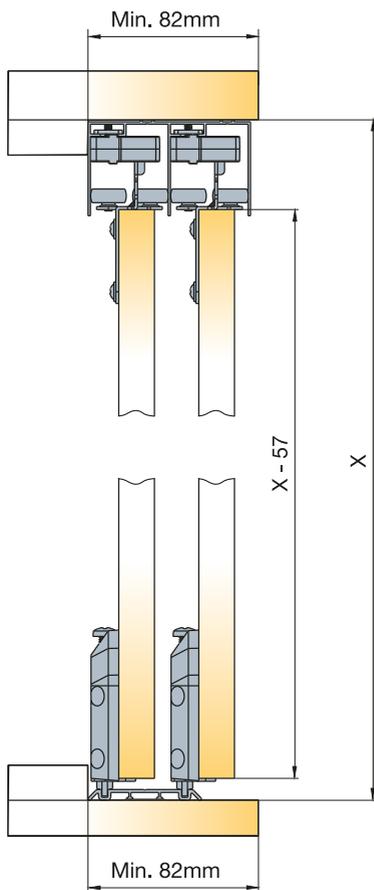

Door drilling pattern

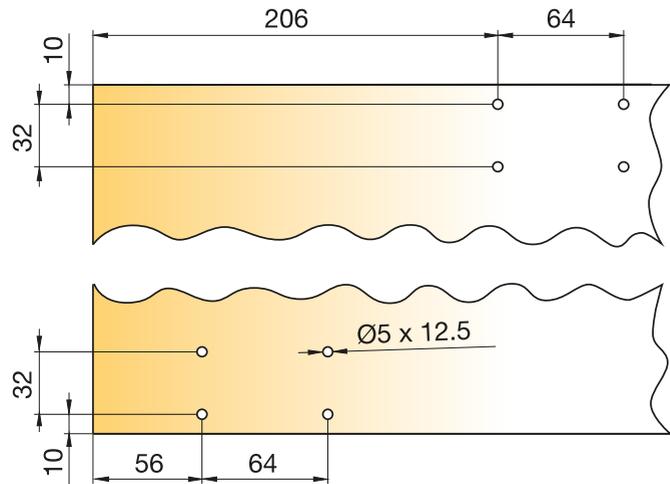


Top and bottom carriage drilling positions

X = space available between top and bottom panel
 X - 57 = door height

Titusoft SD100s

Add-on Damper for Set 200

For bottom running sliding door systems





Titusoft SD100s



Technical details

Released position

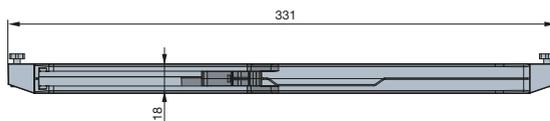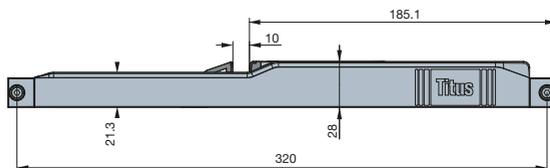

Drawings show example with components presented above

	Item number	Grey
--	-------------	------

973.9060 →

380

System consists of the following (quantity for 2 door cabinet):

Standard component 2 pcs

Titusoft SD100s mechanism



Customised components to suit the customer's sliding door system

Attachment base 4 pcs



Nut 4 pcs




Screw M4 x 16 4 pcs



Activator and adaptor on this page suit Set 200.

Titusoft SD100s capacity:


Up to 50kg per door



- Non-handed design
- Effortless door opening with low pull-out force
- Efficient damping on different door sizes
- Slim design for concealed application


Mounting details

Non-handed design

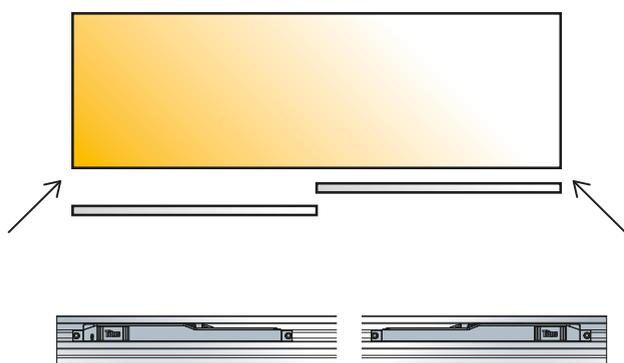


Mount Titusoft SD100s on top rail on both sides of the cabinet (1 mechanism per door).

Mounting position

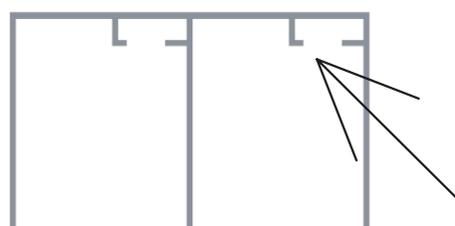

Titusoft SD100s is mounted into the top profile



Fits various U and double U shaped profiles

Space requirements:





Slim design with 30mm height allows for concealed application.

Rail

For Set 200



Screws for top rail are not supplied and depend on the application (cabinet, built-in cabinet). Bottom rail is fixed with self-adhesive tape. Rail is pre-drilled and ready to install.

Technical Details		Rail length (mm)	Item number
<p>Top Rail</p>  		2000	610.9692.070.K1
		2400	610.9693.070.K1
		3000	610.9694.070.K1
<i>*other lengths available upon request</i>			
One set consists of:			
Top Rail		1 pce	
Bottom Rail		1 pce	
<p>Bottom Rail</p>  			

Additional Resources For Set 200 and Titusoft SD100s

Available to view and download from titustekform.com.au:


Assembly instructions

Set 200

Bottom running sliding door system

Assembly instructions
Piano de montaje
Istruzioni di montaggio
Инструкция по сборке
Navodila za montažo
Instrukcja montażu

Titus




Set 200


Bottom running sliding door system
3 doors

Assembly instructions
Piano de montaje
Istruzioni di montaggio
Инструкция по сборке
Navodila za montažo
Instrukcja montażu

Titus



Installation video

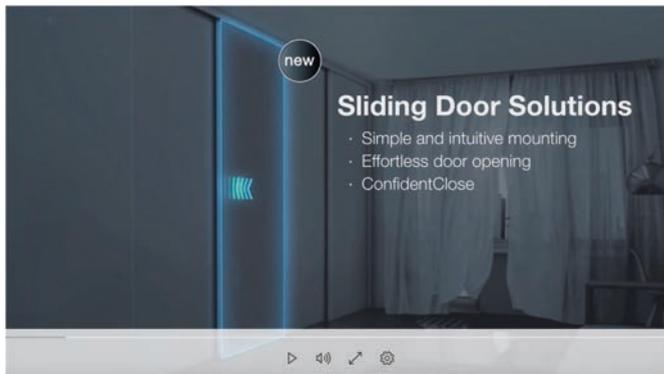

Top and Bottom Running Sliding Doors

GlideSoft TP and GlideSoft RD complete the sliding door offer from Titus Tekform, available with or without soft close damping.



Options to suit every application



System	Application	Best suited for
Set200	Bottom running sliding doors	Built-in cabinets, walk-in closets, room dividers, wardrobes
GlideSoft TP	Cabinet-based panel system for top running tracks	16mm standard and 18mm routed panels
GlideSoft RD	Floor to ceiling panel system for bottom running tracks	10mm or 4mm panel, glass or acrylic
Set F400	Top-hung folding door systems	Room dividers, kitchen pantry and appliance cupboards, wardrobes and partitioned laundries

Titus Tekform offers a range of systems to meet your sliding and folding door requirements, including our new bi-fold door **Set F400** product.

GlideSoft RD provides a floor to ceiling panel system for bottom running tracks. It is compatible with 10mm or 4mm panel, glass and acrylic with a 60kg load capacity per door.

GlideSoft TP provides a cabinet based panel system for top running tracks. It takes 16mm standard and 18mm routed panels with a 50kg load capacity per door.

Set 200 by Titus provides a non-handed bottom running system for use with double U shaped top profiles. Available with Titus proprietary damping technology, **Titusoft SD100s**, for smooth, consistent damping.

Titus Tekform Australia

www.titustekform.com.au

info@titustekform.com.au

 1300-0-TITUS

Stefano Orlati New Zealand

www.stefano-orlati.com

stefano-orlati@titusplus.com

Connect with us

 [LinkedIn.com/company/titustekform](https://www.linkedin.com/company/titustekform)

 [Instagram.com/titustekform](https://www.instagram.com/titustekform)

 [Pinterest.com/titustekform](https://www.pinterest.com/titustekform)

 "Titus Tekform"